


Distributor to Industry, Inc.
 1017 East Murdock Street
 Wichita, Kansas 67214
Toll Free: 800.835.2838
Phone: 316.263.9511
Email: sales@trydti.com • **Website:** www.trydti.com

Rexroth Series 840 4-Way Directional Control Valve

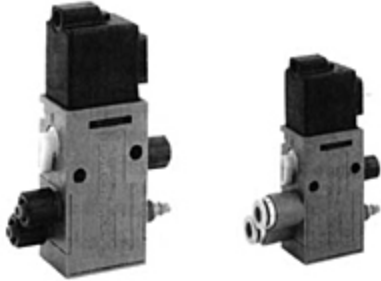

4 Way / 2 Position Poppet Valves Single & Double Solenoid, Single & Double Air Pilot

TECHNICAL DATA:

Port Sizes: Integrated Fittings: 1/4" O.D. x 0.040" wall poly tubing (grey tube nuts)

Flow: $C_v = 0.20$

Working Pressure:

20 psi minimum (External pilots not available)
 150 psi maximum (Below 105°F) - solenoid & air pilot valves
 115 psi maximum (105°F - 122°F) - solenoid valves
 115 psi maximum (105°F - 140°F) - air pilot valves
 No vacuum service

Temperature Range:

+5° to +122° F (20-115 psi)- solenoid valves
 +5° to +140° F (20-150 psi) - air pilot valves
 +5° to 105° F (20-150 psi) - solenoid & air pilot valves

Media: Air (either lubricated or non-lubricated)

Materials: Polyacetal Engineering Plastic with polyurethane seals and diaphragm

Weight: 2.6 oz. (single solenoid)

Manual Override: Locking

Voltage Tolerance: $\pm 10\%$

Note: Valves on this page are not supplied with connectors. Connectors must be ordered separately. See The Wireways, Connectors and Manifolds section.

Results 1 - 11 of 11

<u>Item #</u>	<u>Old Part #</u>	<u>Description</u>
5728409990	P-026641-00001	Single Solenoid 120 VAC/50-60 Hz
R432008661	P-026641-00002	Single Solenoid 220/230 VAC
R432008662	P-026641-00004	Single Solenoid 12 VDC
5728409980	P-026641-00005	Single Solenoid 24 VDC
R432008663	P-026641-00006	Single Solenoid 24 VAC/50-60 Hz
R432008664	P-026642-00001	Double Solenoid 120 VAC/50-60 Hz
R432008665	P-026642-00004	Double Solenoid 12 VDC
R432008666	P-026642-00005	Double Solenoid 24 VDC
R432030358	P-026642-00006	Double Solenoid 24 VAC/50-60 Hz
R432008659	P-026639-00000	Single Air Pilot
R432008660	P-026640-00000	Double Air Pilot

Results 1 - 11 of 11